


HERE'S THE
Inside Story
ON TWO **Norbord** FINISHING SOLUTIONS



FX Plywood

is constructed of Canadian Aspen inner-plyes, two outer crossbands of high-quality MDF, and decorative face and back veneers.

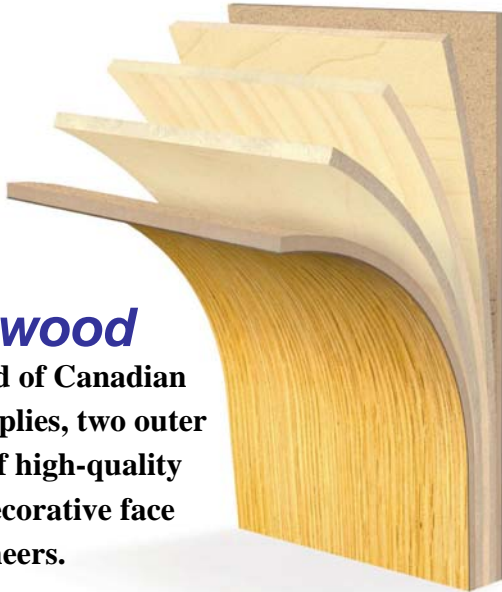

FX-Platform

is simply our FX Plywood without the decorative face and back veneers. It is an advanced, engineered platform for those who prefer to apply their own specialty veneer, plastic laminate, melamine, foil, or paint.

Compared to veneer core

- Flat MDF crossbands improve finishing characteristics
- Fewer sand-throughs on thin veneers
- No telegraphing through decorative faces
- Better thickness tolerances
- Suitable for horizontal applications
- No knots to show through and discolor white face veneers
- 100% void free crossbands

Compared to MDF and PB cores

- Lighter weight
- Better screw holding
- Less tool wear
- Stronger: better MOR & MOE
- Easier machining

Norbord FX Plywood

With face veneers.....or without

Norbord FX-Platform

When the finish **REALLY** counts!



Norbord Industries, 1 Toronto Street, Suite 600, Toronto, Ontario, Canada M5C 2W4

Phone: (416) 365-0710

Fax: (416) 777-4415

www.norbord.com

Norbord FX Plywood & FX-Platform

What standards does Norbord Hardwood Plywood meet?

- American National Standard for Hardwood Decorative Plywood, ANSI/HPVA HP-1-2004.
- ISO 14001 Certification means we have in place a system to identify, document, and minimize/eliminate any environmental impacts resulting from our operations.
- SFI (Sustainable Forestry Initiative)

What makes Aspen an excellent renewable resource?

Canadian Aspen is one of the best species for sustainable forestry because it is a post disturbance species. When an area of Aspen trees is harvested, regeneration occurs naturally through the root system and from the stump. It's the harvesting that causes new trees to grow.

Mill Location	Cochrane, Ontario
Product	Hardwood Plywood Stock Panels
Core Specie	Trembling Aspen (Populus Tremuloides)*(*1/4" is fuma)
Resin	Interior, low fuming urea formaldehyde Type II. Less than .2ppm emissions
Standards	ANSI/HPVA HP-1-2004

Thickness	# of plies		
	Nominal	FX	FX-P
	1/2"	5	3
	3/4"	7	5
	1"	9	7

Sizes	1/2",3/4",1" = 48 1/2" x 96 1/2"
--------------	----------------------------------

FX Face Species	Rift	Rotary	Plain Sliced
Birch		X	
Maple		X	X
Red Oak		X	X
Alder			X
Cherry			X
Hickory			X
Knotty Pine			X
Mahogany			X
Sapele			X
Walnut			X
White Ash			X
White Oak	X		X

Packaging		Truck	Rail
FX & FX-P	1/2"	50	75
	3/4"	35	50
	1"	25	35

Distributed By:

Norbord Industries Inc.
Mill Phone: (800) 850-8061
Mill Fax: (705) 272-3570

